Form No. **907534** Revision B

RICULTURE

1330 Truck Mounted Scavenger® Spreader

PARTS MANUAL

Introduction

When ordering service parts, specify the correct part number, full description, quantity required, the unit model number and serial number.

The Spreader model and serial numbers are on a plate located on the front, left corner of the Tank. "Right" and "left" are determined from a position standing behind the Spreader and facing in the direction of travel. From this position, the Expeller is on the "right" side.

GEHL® Company reserves the right to make changes or improvements in the design or construction of any part of the unit without incurring the obligation to install such changes on any previously delivered units.

Refer to the abbreviations table located on this page for the various fastener descriptions. Standard attaching hardware torque values are also provided on the inside back cover.

Items shown in the parts list that do not have Reference Numbers are shown for reference purposes only and are NOT available for purchase.

Unless otherwise specified, all cap screws or bolts are Grade 5, zinc plated; hexagon nuts for Grade 5 screws or bolts are Grade B; hexagon nuts for other screws or bolts are Grade A.

NOTE: The following abbreviations may used herein:

ASSD - Assembled
ASSY - Assembly
CB - Carriage Bolt
CCW - Counterclockwise

CP - Cotter Pin

CS - Cap Screw (Hexagon Head)

CTR - Center CW - Clockwise DEG - Degree DIA - Diameter

FCS - Flanged Cap Screw FHMS - Flat Head Machine Screw

FL - Flanged

FLN - Flanged Lock Nut (Hexagon) FLS - Flanged Lock Screw (Hexagon)

FW - Flat Washer GA - Gauge GR - Grade

HD - Hard or Head HN - Hex Nut INCL - Includes JT - Joint

LFLN - Large Flanged Lock Nut (Hexagon)

LG - Large
LH - Left Hand
LN - Lock Nut
LT - Left

LW - Lock Washer
M - Metric
MM/mm - Millimeter
NF - National Fine
NS - Not Serviced
PB - Plow Bolt
PTO - Power Take Off

RH - Right Hand RHMS - Round Head Machine Screw

RPM - Revolutions Per Minute

RT - Right SERR - Serrated

SHCS - Socket Head Cap Screw
SHSS - Socket Head Set Screw
SN - Serial Number or Slotted Nut

SQ - Square

T - Tooth or Teeth

TFS - Thread Forming Screw
THMS - Truss Head Machine Screw

THRD - Thread WLDMT - Weldment

TABLE OF CONTENTS

Subject	Page No.
Introduction	Inside Front Cover
Decal Locations	2-7
Auger, Liner & Slides	8-9
Auger & Expeller Drive	10-11
Expeller & Discharge Gate	
Hydraulics	
Guards & Shields	
Component Breakdowns	
Hydraulic Cylinders	
Auger	
Gearbox	
Options & Accessories	22-34
Solids Spill Guards	22
Splash Guards & Rails	23
Hydraulic Lid Kit	24-25
Light Kit	26
Fenders & Mud Flaps	27
Mechanical Drive Kit, 1:1	28
PTO, 1:1 & 2:1 Mechanical Drive Kits	
Mechanical Drive Kit, 2:1	30-31
Transmission, 2:1	32
Hydraulic Control Kit	33-34
Hydraulic Control Kit Control Box	35
Chain Oiler	36-37
Index	38
Numerical Index	
Hydraulic Fitting Data	44
Standard Hardware Torque specifications	Inside Back Cover

DECAL LOCATIONS

GENERAL INFORMATION

Decal locations information is provided to assist in the proper selection and application of new decals, in the event the original decals become damaged or the machine is repainted. Refer to the listing for the illustration reference number, part number, description and quantity of each decal provided in the kit. Refer to the appropriate illustrations for replacement locations.

NOTE: Refer to the SAFETY chapter for information on the safety decals in the decal kit.

To ensure proper selection for correct replacement decals, compare all of the various close-up location illustrations to your machine BEFORE starting to refinish the unit. Then circle each pictured decal (applicable to your machine) while checking off its part number in the listing. After you have verified all the decals needed for replacement, set aside unneeded decals for disposal.

NEW DECAL APPLICATION

Surfaces MUST be free from dirt, dust, grease and other foreign material before applying the new decal. To apply a solid-formed decal, remove the smaller portion of the decal backing paper and apply this part of the exposed adhesive backing to the clean surface while maintaining proper position and alignment. Slowly peel off the other portion of the backing paper while applying hand pressure to smooth out the decal surface.



ALWAYS observe safety precautions shown on decals. If decals become damaged, or if the unit is repainted, replace the decals. If repainting, BE SURE that ALL decals from the kits that apply to your machine are affixed to your unit.

PAINT NOTICE

Use this list to order paint for refinishing:


906315 One Gal. AG Red 906324 One Qt. Light Grey

906316 6 (12 oz. Spray Cans) AG Red 906325 6 (12 oz. Spray Cans) Light Grey

The decal kit number for the 1330TM Scavenger Manure Spreader is 141263. The kit includes the following:

	_	
Ref.	Part	
No.	No.	Description & Quantity
1	145216	Red Reflector Strip (2 Places)
2	091444	DANGER - Rotating Drive Line
3	093020	Lubrication Symbol (4 Places)
4	093208	Rotating Spiral Symbol
5	093366	IMPORTANT - Store Manual Here
6	093367	WARNING - Owner's Responsibility & Read Manual
7	093373	WARNING - General Safety Precautions
8	093457	WARNING - Keep Door Closed
9	093638	DANGER - Rotating Expeller (2 Places)
10	093639	DANGER - Manure Gas
11	093653	WARNING - Rotating Drive Line
12	094912	Colorbar (2 Places)
13	094913	GEHL (2 Places)
14	094951	Made in USA
15	115628*	Decal - All Model Numbers (2 Places)
16	120399	DANGER - Rotating Auger (3 Places)
17	120740	Scavenger Decal (2 Places)
18	141249	Decal - Patent
19	080247	No Step
20	145217	Amber Reflector Strip (5 Places)
21	122736	GEHL (2 Places)

* 115628 Model Number Decal covers all Scavenger model numbers.

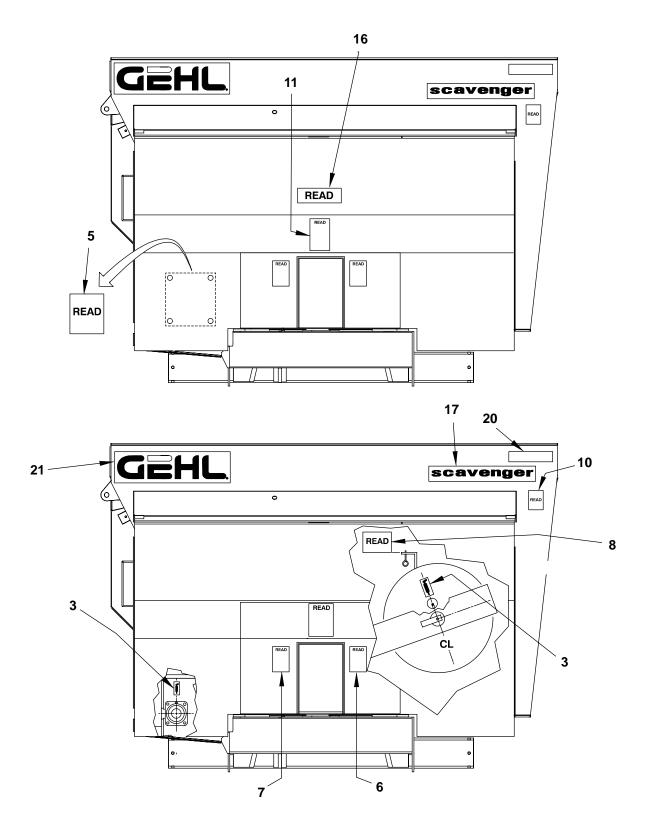

Thanks for your reading.

Please click here to download complete manual instantly.

And can also choose other manuals.

Feel free --->write to me with any questions.

Our service email:

manuals007@hotmail.com