


Form No.
907570

Replaces
904412

1540/1580

Forage Blowers

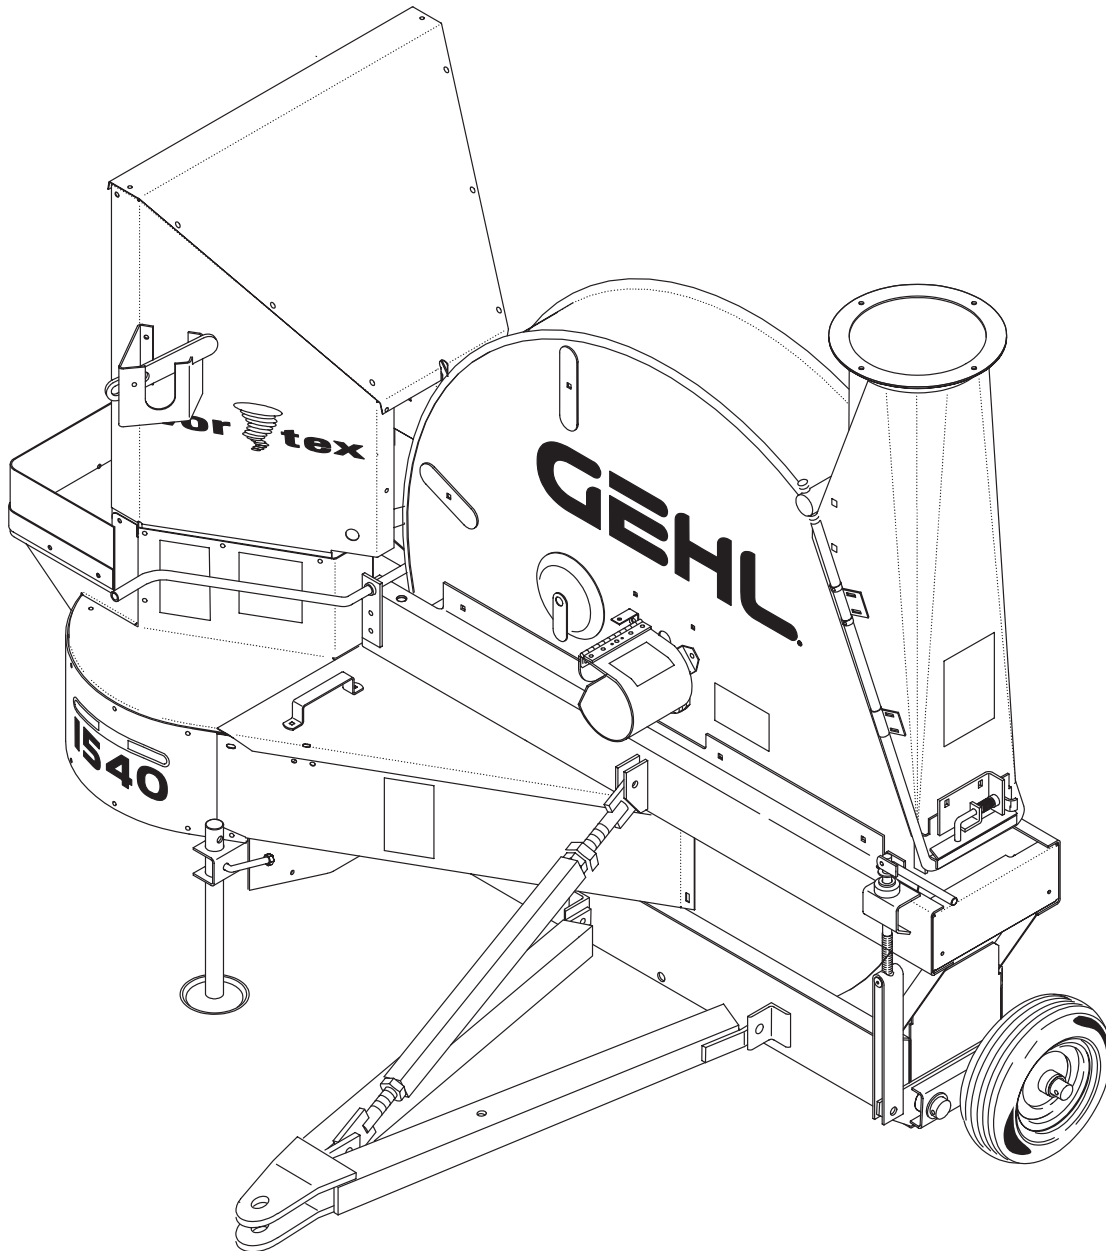

PARTS MANUAL

GEHL® AGRICULTURE

Introduction

When ordering service parts, specify the correct part number, full description, quantity required, the unit model number and serial number.

The Forage Blower model and serial numbers are on a plate located on the left side of the Rear Main Frame, adjacent to the Rotor Drive Sheave. “Right” and “Left” are determined from a position standing behind the Forage Blower. From this position, the Blower Outlet is toward the “left” side and the Infeed Hopper is on the “right” side.

GEHL® Company reserves the right to make changes or improvements in the design or construction of any part of the unit without incurring the obligation to install such changes on any previously delivered units.

NOTE: *On original tire replacement, company policy prohibits the sale of replacement tires for all GEHL machinery. Replacement Wheel Sets are available and tire size information is called out with the Wheel Sets to facilitate replacement tire selection. ALL REPLACEMENT TIRES MUST BE PURCHASED LOCALLY.*

Refer to the abbreviations table located on this page for the various fastener descriptions. Standard attaching hardware torque values are also provided on the inside back cover.

In the exploded view parts list, Reference Numbers may have additional information following the Reference Number.

A Tear Drop symbol will indicate an application of a “wet” product such as oil, and the number inside the Tear Drop will correspond to the description in the Parts List.

Also, a number inside a hexagon will be the torque value required, in foot pounds, on the associated Reference Number. Items shown in the parts list that do not have Reference Numbers are shown for reference purposes only and are NOT available for purchase.

Unless otherwise specified, all Cap Screws or Bolts are Grade 5, zinc plated; Hexagon Nuts for Grade 5 Screws or Bolts are Grade B; Hexagon Nuts for other Screws or Bolts are Grade A.

NOTE: *The following abbreviations may be used herein:*

AR – As Required
ASSD – Assembled

ASSY	– Assembly
CB	– Carriage Bolt
CCW	– Counterclockwise
CP	– Cotter Pin
CS	– Cap Screw (Hexagon Head)
CTR	– Center
CW	– Clockwise
DEG	– Degree
DIA	– Diameter
FCS	– Flanged Cap Screw
FHMS	– Flat Head Machine Screw
FL	– Flanged
FLN	– Flanged Lock Nut (Hexagon)
FLS	– Flanged Lock Screw (Hexagon)
FW	– Flat Washer
GA	– Gauge
GR	– Grade
HD	– Hard or Head
HJN	– Hex Jam Nut
HN	– Hex Nut
INCL	– Includes
JT	– Joint
LG	– Large
LH	– Left Hand
LN	– Lock Nut
LW	– Lock Washer
M	– Metric
MM/mm	– Millimeter
NF	– National Fine
PB	– Plow Bolt
PTO	– Power Take Off
RH	– Right Hand
RHMS	– Round Head Machine Screw
RPM	– Revolutions Per Minute
RT	– Right
SERR	– Serrated
SHCS	– Socket Head Cap Screw
SHSS	– Socket Head Set Screw
SN	– Serial Number or Slotted Nut
SQ	– Square
SQSS	– Square Head Set Screw
T	– Tooth or Teeth
TFS	– Thread Forming Screw
THMS	– Truss Head Machine Screw
THRD	– Thread
WLDMT	– Weldment
#	– Number



– Torque Required in foot pounds



– Indicates a Fluid Application

TABLE OF CONTENTS

Introduction	Inside Front Cover
Table Of Contents	1
Decal Locations	2-3
Spinner Bearings – After SN23900-1540 & SN7700-1580	4-5
Spinner Bearings – Before SN23901-1540 & SN7701-1580	6-7
Spinner Drive	8-9
Fan Assembly, Housing & Outlet	10-13
Frame & Wheels	14-15
Spinner Emergency Shutoff Control	16-17
Spinner Inlet	18-19
Hopper Inlet & Belt Cover	20-21
Hopper & Spinner Covers	22-23
FB1540 – 540 RPM Telescoping Drive (35 Series)(After SN25500)	24
FB1540 – 540 RPM Telescoping Drive (35 Series)(Before SN25501)	25
FB1540 – 540 RPM Telescoping Drive (55 Series)(After SN25500)	26
FB1540 – 540 RPM Telescoping Drive (55 Series)(Before SN25501)	27
FB1580 – Transmission (After SN7316)	28
FB1580 – Transmission (Before SN7317 & After SN6442)	29
FB1580 – Transmission (Before SN6443)	30
FB1540 – 540 RPM Telescoping Drive (55 Series)(After SN8413)	31
FB1540 – 540 RPM Telescoping Drive (44 Series)(After SN6442 & Before SN7317)	32
FB1540 – 540 RPM Telescoping Drive (55 Series)(After SN7316 & Before SN8413, Before SN6443)	33
FB1580 – 1000 RPM Telescoping Drive (44 Series)(After SN8450)	34
FB1580 – 1000 RPM Telescoping Drive (44 Series)(After SN8450 & Before SN7317)	35
FB1580 – 1000 RPM Telescoping Drive (44 Series) (After SN7316 & Before 8451, After SN5700 & Before SN6643)	36
FB1580 – 1000 RPM Telescoping Drive (35 Series)(Before SN5701)	37
Optional Equipment	38-44
Water Injection System	38
Tire Guard	39
9 Inch Blower Pipes & Elbows	40
Adjustable Deflector	41
9 Inch Quick Clamp	42
Small Grain Shield	43
Flexible Deflector	43
Safety Chain	44
Index	45
Numerical Index	46-50
Standard Hardware Torque Specifications	Inside Back Cover

Thanks for your reading.

Please click [here](#) to download complete manual instantly.

And can also choose other manuals.

Feel free ---> write to me with any questions.

Our service email:

manuals007@hotmail.com